




# AC Ammeter

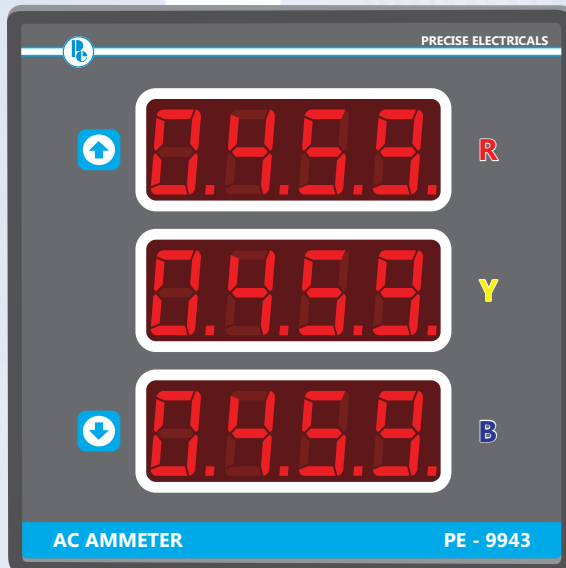

- ORDER CODE  
PE-9943
- DESCRIPTION  
3 Phase Ammeter

## GENERAL FEATURES

- ❖ Easy to install.
- ❖ Friendly user interface.
- ❖ Maximum range upto 1600 Amp
- ❖ Class 1 ( $\pm$  digit)

## DISPLAY FEATURES

- ❖ Individual 3 phase display of current
  - R phase
  - Y phase
  - B phase

## MECHANICAL SPECIFICATIONS

- ❖ Dimension 96(L) x 96(W)x 60(D)mm
- ❖ Operating Temp Range +5°C to 60°C
- ❖ Mounting Panel Mounting
- ❖ Weight 480 Gm

## ELECTRICAL SPECIFICATIONS

- ❖ AC Ammeter with single input current & in built selector switch
- ❖ Auxiliary Supply 230Vac $\pm$ 10%
- ❖ Frequency 50Hz/60Hz $\pm$ 5%
- ❖ Input Current /5A.
- ❖ CT primary setting range 0 to 9900

PE - 9943 is Capable to monitoring 3 Phase Current at a single time